


Poles	A	B	C	D	Poles	A	B	C	D
10	5.00	9.50	-	2.40	20	11.25	15.75	7.00	1.15
12	6.25	10.75		1.15	22	12.50	17.00	7.00	2.40
14	7.50	12.00		2.40	24	13.75	18.25	9.50	1.15
16	8.75	13.25	4.50	1.15	26	15.00	19.50	9.50	2.40
18	10.00	14.50	4.50	2.40	28	16.25	20.75	12.00	1.15

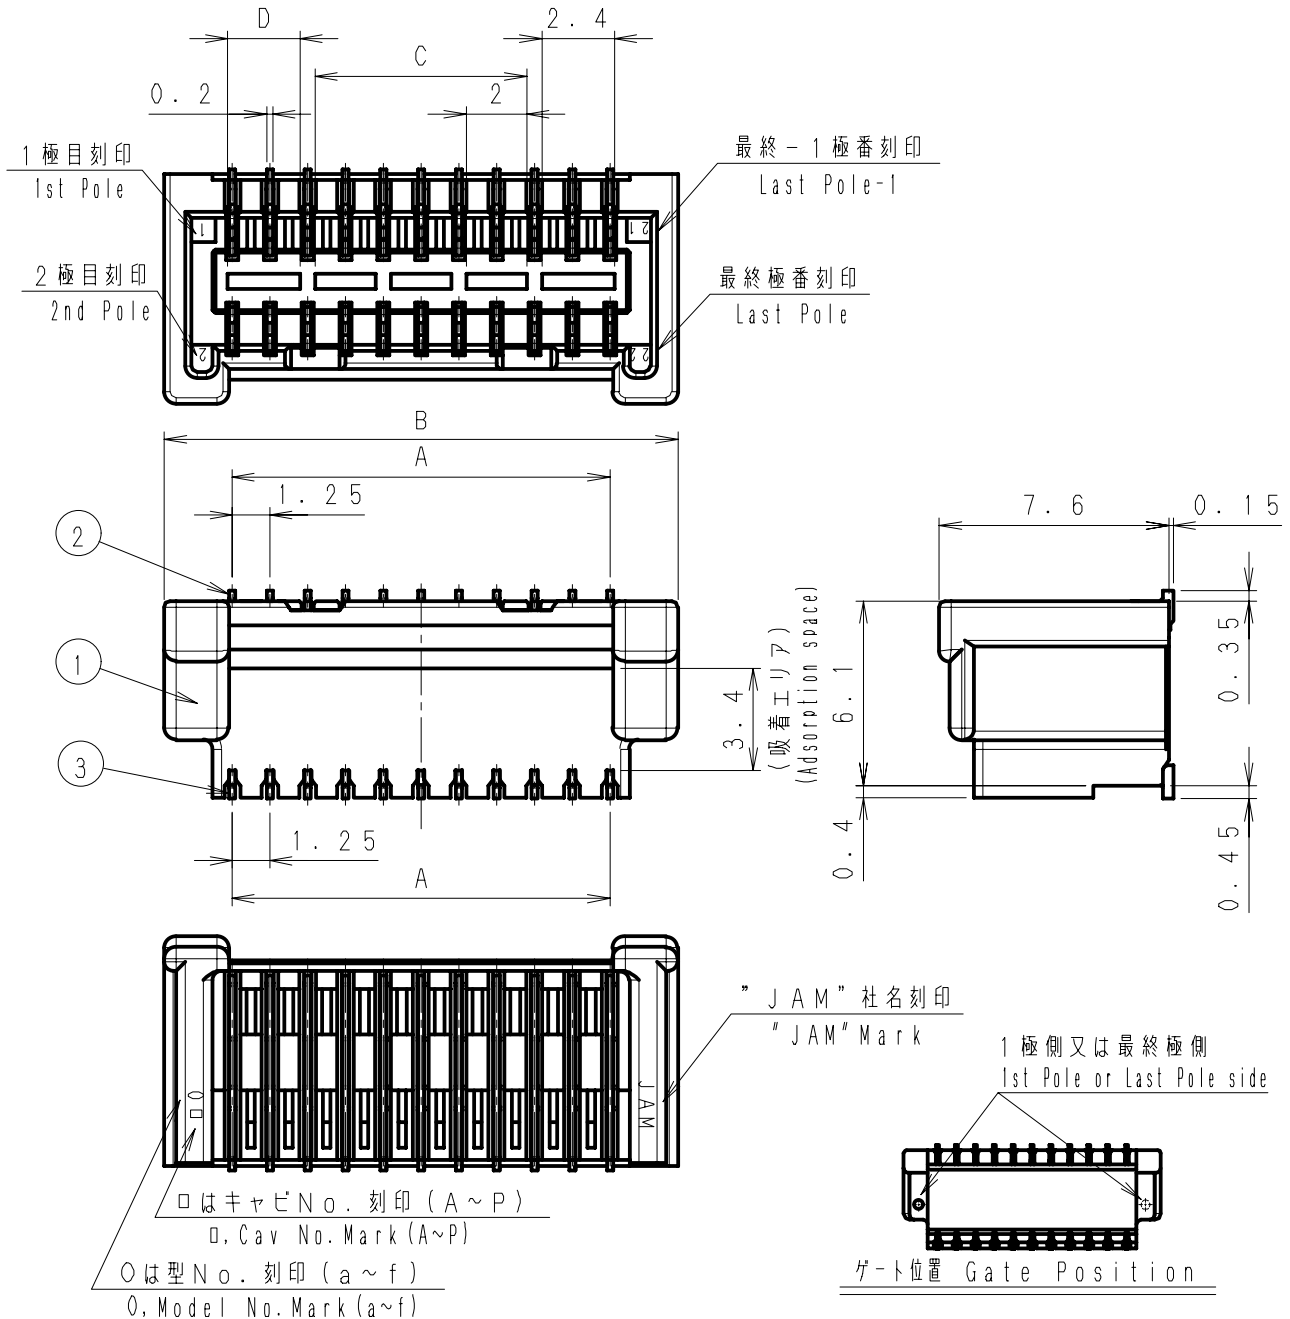

△5	. .					③	リン青銅 Phosphor bronze	スズメッキ Tin-Plating	
△4	. .				STW12-□□WH	②			
△3	. .					①	ナイロン6T Nylon 6T	UL94V-0 (GF入り) UL94V-0 with GF	
△2	. .				製品番号 PRODUCT No.	No.	材 料 MATERIAL	備 考 NOTE	色 COLOR
記号 No.	年月日 DATE	変更記事 REVISION RECORD	設計 DESIGN	承認 APP			製品名 NAME	STWウエハー アングル型 STW Wafer Angle type	
承認 APPROVED	K. Kusano	確認 CHECKED	K. Koizumi	一般公差 TOLERANCE	±0.3	尺度 SCALE	4 / 1	図番 DRAWING No.	JC-1124-12
設計 DESIGN	K. Koizumi	製図 DRAWING	Y. Shimizu	<b>JAPAN AUTOMATIC MACHINE CO., LTD.</b>					